


ESA Series

5-30kW/5-108kWh | Three Phase Energy Storage Solution (HV)

The GoodWe ESA Series 5-30kW/5-108kWh is a three-phase all-in-one energy storage solution that integrates the inverter, battery, and intelligent energy management into a single system. Its pre-wired, modular design unifies the inverter and battery, delivering an installation-friendly structure that streamlines setup and accelerates commissioning. With four battery module options-5, 6, 8, and 9kWh-up to 12 modules can be connected for a total storage capacity of 108kWh. Featuring simplified configuration, large expandable storage, and an AI-driven EMS for dynamic tariff optimization, the ESA Series 5-30kW/5-108kWh provides an efficient, flexible, and future-ready solution for both residential and small commercial use.

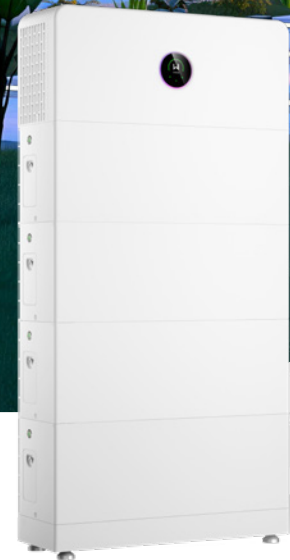

Optimized Performance

- Up to 200% DC oversizing & AC backup overload
- Up to 1C charge/discharge for rapid energy cycling
- Smart fan cooling for quiet operation, noise as low as 30dB*



Superb Safety & Reliability

- Advanced 6-layer safety protection
- AI-driven AFCI 3.0 for safety
- Heating mode ensures reliable performance even in -20°C



Flexible & Adaptable Applications

- Dual-port design for whole-home backup
- Flexible battery mixing with different capacity or old & new batteries
- Supports on- and off-grid parallel operation



Smart Control & Monitoring

- Ready for AI-driven EMS
- Seamless switching to backup <4ms
- One-click upgrade & one-click configuration

Technical Data	GW5K- ETA-G20	GW6K- ETA-G20	GW8K- ETA-G20	GW9.999K- ETA-G20	GW10K- ETA-G20	GW12K- ETA-G20	GW15K- ETA-G20	GW20K- ETA-G20	GW25K- ETA-G20	GW29.999K- ETA-G20	GW30K- ETA-G20	
Battery Side												
Battery Type	LFP (LiFePO4)											
Nominal Voltage (V)	750											
Voltage Range (V)	700 ~ 950											
Start-up Voltage (V)	720											
Number of Battery Input	1											
Max. Continuous Charging Current (A)	6.7	8.1	10.7	13.4	13.4	16.1	20.1	26.7	33.3	40.0	40.0	
Max. Continuous Discharging Current (A)	7.4	8.9	11.8	14.7	14.7	17.7	22.1	29.4	36.7	44.1	44.1	
Max. Charging Power (kW)	5.0	6.0	8.0	10.0	10.0	12.0	15.0	20.0	25.0	30.0	30.0	
Max. Discharging Power (kW)	5.5	6.6	8.8	11.0	11.0	13.2	16.5	22.0	27.5	33.0	33.0	
PV Side												
Max. Input Power (kW)	10	12	16	20	20	24	30	40	50	60	60	
Max. Input Voltage (V) ¹	1000											
MPPT Operating Voltage Range (V) ²	120 ~ 950											
Start-up Voltage (V)	150											
Nominal Input Voltage (V)	750											
Max. MPPT Current (A)	21 / 21 / 21			21 / 21 / 21 / 21			21 / 21 / 42 / 42			21 / 21 / 42 / 42		
Max. MPPT Short Circuit Current (A)	26 / 26 / 26			26 / 26 / 26 / 26			26 / 26 / 52 / 52			26 / 26 / 52 / 52		
Number of MPPTs	3			4			4			4		
Number of Strings per MPPT	1 / 1 / 1			1 / 1 / 1 / 1			1 / 1 / 2 / 2			1 / 1 / 2 / 2		
AC Side (Grid Port)												
Rated Power (kW)	5	6	8	9.999	10	12	15	20	25	29.999	30	
Max. Power (kW)	5	6	8	9.999	10	12	15	20	25	29.999	30	
Rated Apparent Power to Grid (kVA)	5	6	8	9.999	10	12	15	20	25	29.999	30	
Rated Apparent Power from Grid (kVA)	5	6	8	9.999	10	12	15	20	25	29.999	30	
Max. Apparent Power to Grid (kVA) ³	5	6	8	9.999	10	12	15	20	25	29.999	30	
Max. Apparent Power from Grid (kVA) ⁴	43.5	43.5	43.5	43.5	43.5	43.5	43.5	43.5	55.2	55.2	55.2	
Nominal Voltage (V)	220 / 380, 230 / 400, 3L / N / PE											
Voltage Range (V) (According to local standard)	180 ~ 260											
Nominal Frequency (Hz)	50 / 60											
Frequency Range (Hz)	45 ~ 55 / 55 ~ 65											
Rated Current to Grid (A)	7.6@380V 7.3@400V	9.1@380V 8.7@400V	12.2@380V 11.6@400V	15.2@380V 14.5@400V	15.2@380V 14.5@400V	18.2@380V 17.4@400V	22.8@380V 21.8@400V	30.4@380V 29.0@400V	37.9@380V 36.3@400V	45.5@380V 43.5@400V	45.5@380V 43.5@400V	
Rated Current from Grid (A)	7.6@380V 7.3@400V	9.1@380V 8.7@400V	12.2@380V 11.6@400V	15.2@380V 14.5@400V	15.2@380V 14.5@400V	18.2@380V 17.4@400V	22.8@380V 21.8@400V	30.4@380V 29.0@400V	37.9@380V 36.3@400V	45.5@380V 43.5@400V	45.5@380V 43.5@400V	
Max. Current to Grid (A) ⁵	7.6@380V 7.3@400V	9.1@380V 8.7@400V	12.2@380V 11.6@400V	15.2@380V 14.5@400V	15.2@380V 14.5@400V	18.2@380V 17.4@400V	22.8@380V 21.8@400V	30.4@380V 29.0@400V	37.9@380V 36.3@400V	45.5@380V 43.5@400V	45.5@380V 43.5@400V	
Max. Current from Grid (A) ^{5*}	63	63	63	63	63	63	63	63	80	80	80	
Power Factor	0.8 leading ... 0.8 lagging											
THDI	<3%											
AC Side (Back-up Port)												
Rated Apparent Power (kVA)	5	6	8	10	10	12	15	20	25	30	30	
Max. Apparent Power (kVA) ⁶	Off-grid: 5.5 (10.0, 10s) on-grid: 43.5	Off-grid: 6.6 (12.0, 10s) on-grid: 43.5	Off-grid: 8.8 (16.0, 10s) on-grid: 43.5	Off-grid: 11.0 (20.0, 10s) on-grid: 43.5	Off-grid: 11.0 (20.0, 10s) on-grid: 43.5	Off-grid: 13.2 (24, 10s) on-grid: 43.5	Off-grid: 16.5 (30, 10s) on-grid: 43.5	Off-grid: 22.0 (30.0, 10s) on-grid: 43.5	Off-grid: 27.5 (45.0, 10s) on-grid: 55.2	Off-grid: 33.0 (45.0, 10s) on-grid: 55.2	Off-grid: 33.0 (45.0, 10s) on-grid: 55.2	
Nominal Voltage (V)	220 / 380, 230 / 400, 3L / N / PE											
Nominal Frequency (Hz)	50 / 60											
Max. Current (A) ⁶	Off-grid: 11.4, on-grid: 63	Off-grid: 13.7, on-grid: 63	Off-grid: 18.2, on-grid: 63	Off-grid: 22.8, on-grid: 63	Off-grid: 22.8, on-grid: 63	Off-grid: 27.3, on-grid: 63	Off-grid: 33.4, on-grid: 63	Off-grid: 33.4, on-grid: 63	Off-grid: 50.0, on-grid: 80	Off-grid: 50.0, on-grid: 80	Off-grid: 50.0, on-grid: 80	
THDv (@Linear Load)	<3%											
On / Off-grid Switching Time (ms)	<4											
Efficiency												
Max. Efficiency	98.0%	98.0%	98.0%	98.1%	98.1%	98.1%	98.1%	98.1%	98.2%	98.2%	98.2%	
European Efficiency	96.4%	96.9%	97.1%	97.2%	97.2%	97.2%	97.3%	97.3%	97.4%	97.4%	97.4%	
Max. Battery to AC Efficiency	98.0%											
Protection												
PV String Current Monitoring	Integrated											
PV Insulation Resistance Detection	Integrated											
Residual Current Monitoring	Integrated											
PV Reverse Polarity Protection	Integrated											
Battery Reverse Polarity Protection	Integrated											
Anti-islanding Protection	Integrated											
AC Overcurrent Protection	Integrated											
AC Short Circuit Protection	Integrated											
AC Overvoltage Protection	Integrated											
DC Switch	Integrated											
DC Surge Protection	Type II (Type I + II optional)											
AC Surge Protection	Type II											
Rapid Shutdown	Optional											
AFCI	Optional											
Remote Shutdown	Integrated											
General Data												
Operating Temperature Range (°C)	-35 ~ +60											
Relative Humidity	0 ~ 100%											
Max. Operating Altitude (m)	4000 (>2000 derating)											
Cooling Method	Smart Fan Cooling											
User Interface	LED, WLAN + APP											
Communication with BMS	CAN											
Communication	RS485, WiFi + LAN + Bluetooth, 4G + Bluetooth (Optional)											
Communication Protocols	Modbus-RTU, Modbus-TCP											
Weight (kg)	34	34	34	34	34	34	34	34	38	38	38	
Dimension (W x H x D mm)	800 x 340 x 270											
Ingress Protection Rating	IP66											
Mounting Method	Wall/Floor Mounted											

*1: When the input voltage ranges from 950V to 1000V, the inverter will enter the standby mode, and the voltage returns to 950V to enter the normal operation state.
 *2: Please refer to the user manual for the MPPT Voltage Range at nominal Power.
 *3: According to the local grid regulation.
 *4: GOODWE ESA series has internal bypass 63A passthrough ability to support whole home backup solution. If the customer don't want to do any breaker upgrade, the main breaker size in SolarGo(or SEMS+) can be set as previous breaker size.

*5: If the backup port is not used, select an appropriate circuit breaker based on the AC maximum output current.
 *6: "Off grid" means the energy of backup output only comes from PV and battery. "On grid" means the energy of the backup output includes the energy from grid or generator (on-grid) side.
 *: Please visit GoodWe website for the latest certificates.

Technical Data	GW5.1-BAT-D-G20	GW8.3-BAT-D-G20	GW5.1-BAT-D-G21	GW8.3-BAT-D-G21	GW6.0-BAT-D-G20	GW9.0-BAT-D-G20
Battery Type	LFP (LiFePO ₄)					
Rated Energy (kWh)	5.12	8.32	5.12	8.32	6.0	9.0
Usable Energy (kWh)	5.0 ¹	8.0 ¹	5.0 ¹	8.0 ¹	5.8 ²	8.7 ²
Operating Voltage Range (V) (single phase system)	350 ~ 550					
Operating Voltage Range (V) (three phase system)	700 ~ 950					
Max. Input Current (System) (A)	12.0	19.0	12.0	19.0	7.1	10.7
Max. Output Current (System) (A)	13.2	21.0	13.2	21.0	7.9	11.8
Max. Input Power (System) (kW) ³	5.0	8.0	5.0	8.0	3.0	4.5
Max. Output Power (System) (kW) ³	5.0	8.0	5.0	8.0	3.0	4.5
Peak.Output Power (System) (kW) ³	7.5 @10s	12 @10s	7.5 @10s	12 @10s	4.5 @ 10s	6.75 @ 10s
Charging Temperature Range (°C)	-18 ~ +55	-18 ~ +55	+2 ~ +55	+2 ~ +55	-20 ~ +55	-20 ~ +55
Discharging Temperature Range (°C)	-20 ~ +55					
Relative Humidity	4 ~ 100%					
Max. Operating Altitude (m)	4000					
Noise Emission (dB)	≤29	≤29	≤29	≤29	≤27	≤27
Communication	CAN	CAN	CAN	CAN	CAN & 485	CAN & 485
Weight (kg)	57.5 ± 1	79 ± 1	57.5 ± 1	79 ± 1	61 ± 1	77 ± 1
Ingress Protection	IP66					
Dimensions (W × H × D mm)	800 × 326 × 270					
Function Configuration	Heating (Integrated); Aerosol fire extinguishing (Integrated)		Aerosol fire extinguishing (Integrated)		Heating (Integrated); Aerosol fire extinguishing (Integrated)	
Max. Storage time	12 months (-20°C ~ +35°C) 6 months (+35°C ~ +45°C)					
Scalability ⁴	12 pcs					
Mounting Method	Floor stacked / Wall-mounted				Floor stacked / Wall-mounted / Grounded	
Cycle Life ⁵	≥8000	≥8000	≥8000	≥8000	≥10000	≥10000
Standard and Certification	Safety				IEC62619, IEC60730, EN62477, IEC63056, IEC62040, CE, CEC, VDE2510	
	EMC				CE, RCM	
	Transportation				UN38.3, ADR	

*1: Test conditions, 100% DOD (cell 2.85~3.6V voltage range), 0.2P charge & discharge at 25±2°C for battery system at the beginning of life. Usable energy is defined by its initial design value. Actual available energy may vary depending on charge/discharge rate, environmental conditions (e.g. temperature), transport and storage factors.

*2: Test conditions, 100% DOD (cell 2.87~3.61V voltage range), 0.4P charge & discharge at 25±2°C for battery system at the beginning of life. Usable energy is defined by its initial design value. Actual available energy may vary depending on charge/discharge rate, environmental conditions (e.g. temperature), transport and storage factors.

*3: Max. Input Power /Max. Output Power/Peak.Output Power derating will occur related to Temperature and SOC.

*4: For single-column stacked installations, the maximum number of parallel units is 6.

*5: Based on test data under specific laboratory conditions.

*: Based on Lynx D G2 Series technology

*: Please visit GoodWe website for the latest certificates.